


TOTO

Milling Effects to Ceramic Raw Powders

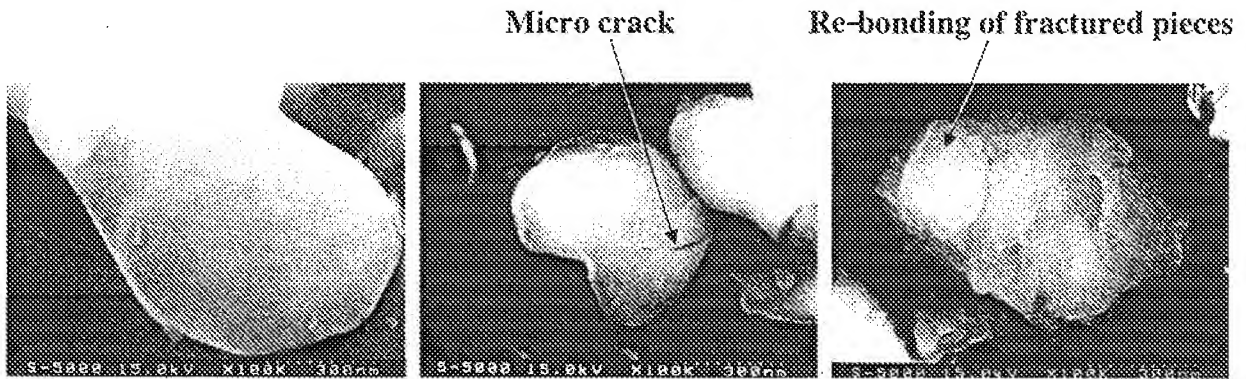

Raw particle	Dry milling for 3 h	Dry milling for 24 h
Crystallite size: 740 Å	345 Å	286 Å
Internal strain: 0.04 %	0.65 %	2.1 %

Crush by the dry planetary mill fractures Al_2O_3 particles randomly.

We take advantage of these morphological changes.

Copyright © 2004 TOTO LTD. All Rights Reserved.


0

TOTO

Milling Effects for Deposition

Dry milling was carried out to give internal strains to powders

After that, deposition was carried out.

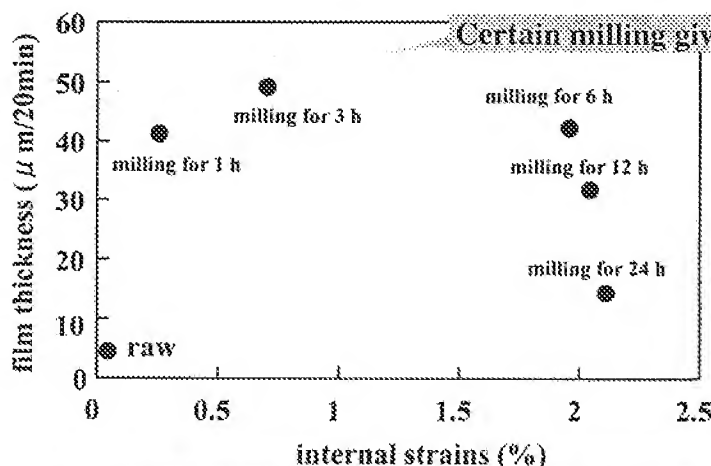


Certain milling gives high fabrication rate


Powder: Al_2O_3
milling method: dry planetary mill
estimation of internal strains:
Using Hall method
Raw powder aged at 1000 degrees C
for the zero standard

Milling is very effective as pre-treatment of powders.

Copyright © 2004 TOTO LTD. All Rights Reserved.

1



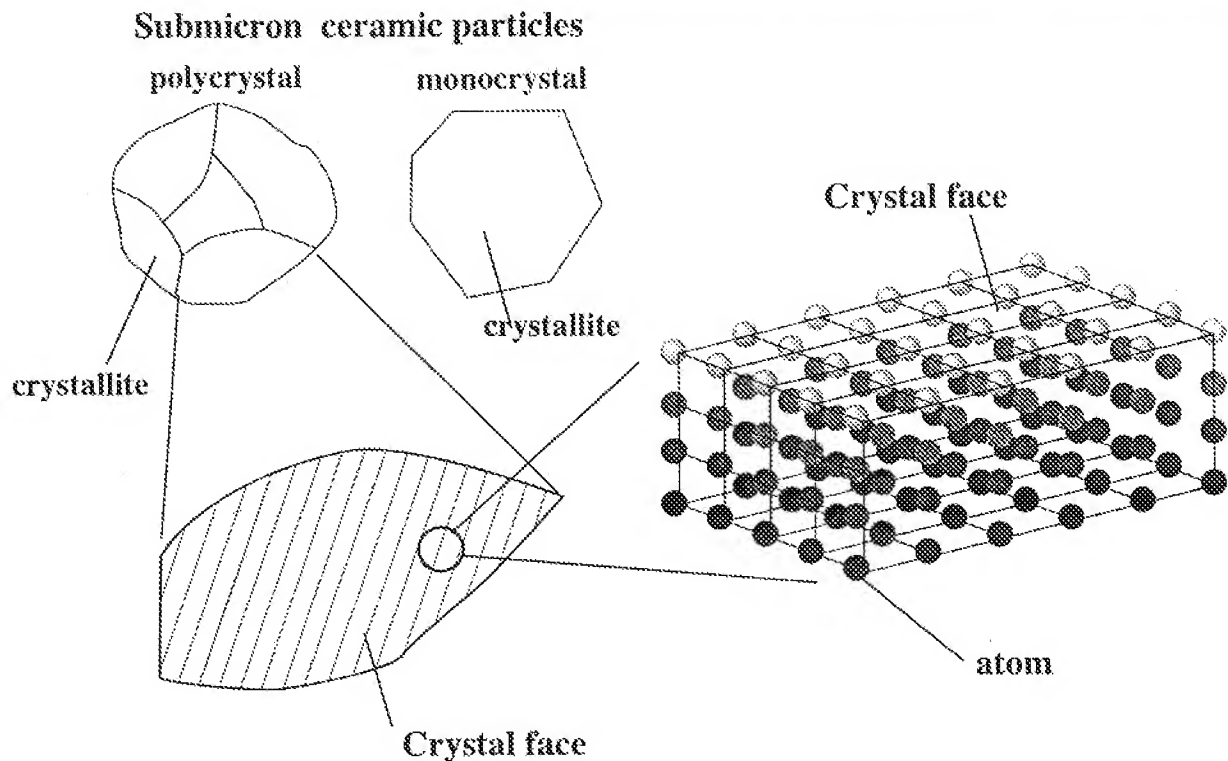


Copyright © 2004 TOTO LTD. All Rights Reserved.

2

Current technique

Structuring depends on the suitable particle velocity and the suitable collision angle toward crystal face.

Self-selectivity for deposition by collision angle

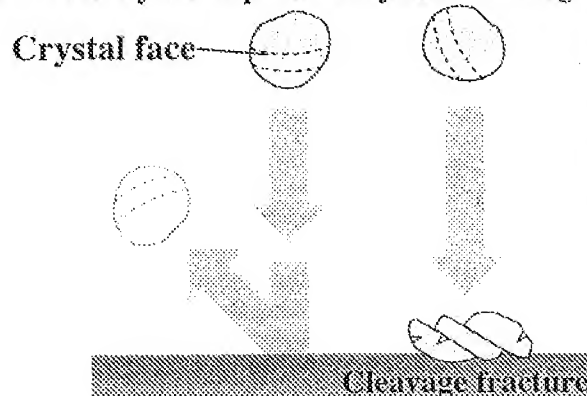

Therefore deposition efficiency is very low.

Our patent

Pretreatment of raw powder

Micro cracks

Internal strains

Random fracture

We achieved wide area deposition with high depo-rate.

Copyright © 2004 TOTO LTD. All Rights Reserved.

3

Current Methods

Collision angle provides self-selectivity
which particles to be deposited in what rate

- The resulted film has a tendency in its crystal structure.
- Low deposition efficiency

New Technology

random fractures upon AD process



⇒ Collision angle provides less self-selectivity.

- Crystal orientation of AD film quantified by integral intensity ratio of specific peaks in XRD profile is very poor and is in good agreement with particles (The deviation is less than 30%).
- More particles are deposited in good rate (High deposition Efficiency)

In the patent, as one technique, internal strains of the particles caused by milling (pretreatment) enables the random fractures.

TOTO

Features of Aerosol Deposition (AD)

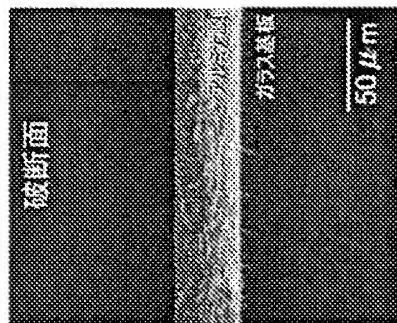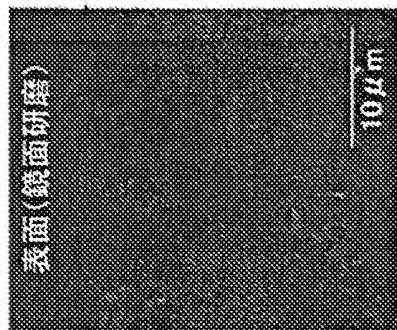

Surface

Fracture cross section

Appearance

- AD is the technique to fabricate thick (1 to several tens μm) ceramic films
- Room temperature process
- Films are composed of nano-crystal dense structure
- Good performance in adhesion, hardness, translucency

Copyright © 2004 TOTO LTD. All Rights Reserved.


2

EXHIBIT


B

tabbles

JCPDS card

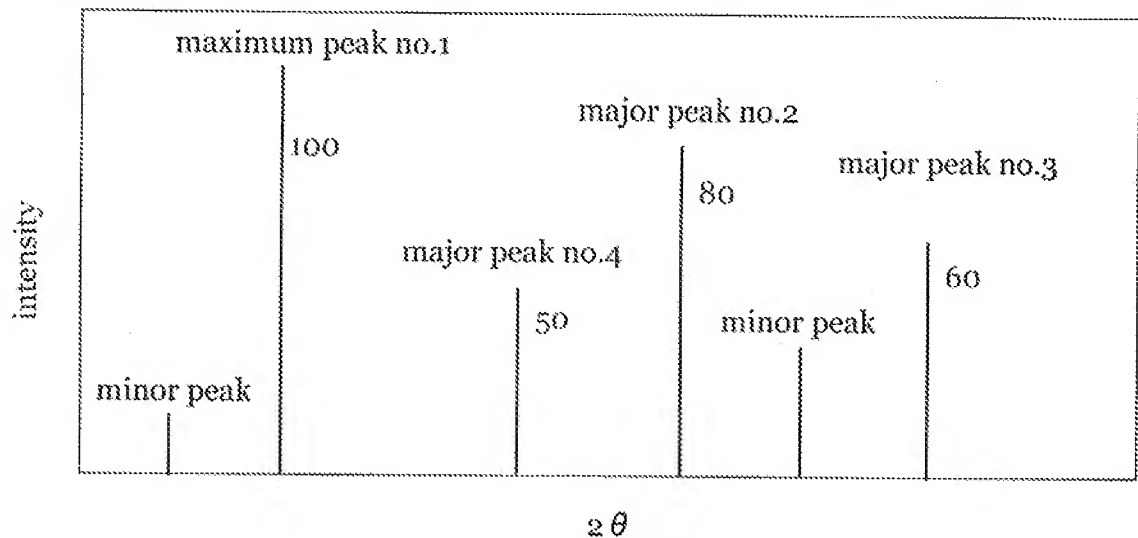

XRD chart of AD structure

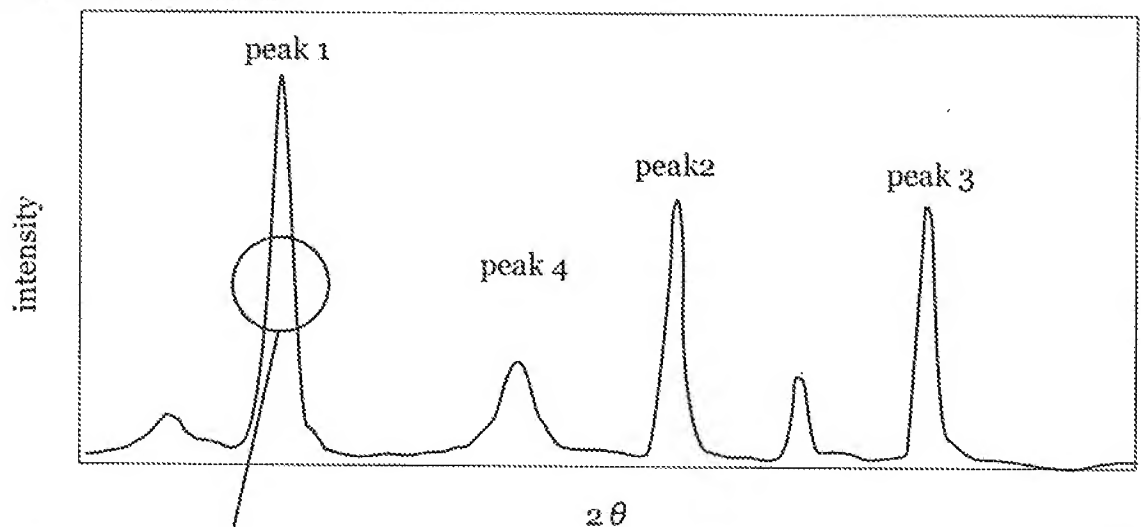


integrated intensity estimation by triangle approximation method

$$\text{integrated intensity} = (\text{peak height}) * (\text{half width})$$

planimetry of this area

xxx mm²

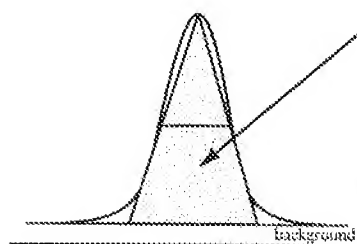

	peak 1	peak2	peak3	peak4
peak intensity from JCPDS	100	80	60	50
integrated intensity from XRD	20 mm ²	16.4 mm ²	10.6 mm ²	4.4 mm ²
revised value	100	82	53	22
deviance of oriantation	—	2%	12%	56%

no orientation < 30%

$$(1-82/80)*100 \%$$

